

产品说明 Product Description:

1.外观 Appearance:



>30CM距离, <5S目视, 无腐蚀、刮伤、氧化  
No corrosion, scratches, oxidation on surface  
Inspection condition:

Inspect from >30cm away and for <5 seconds

2.环保: 符合ROHS&REACH

RoHS&REACH compliance: Yes

REV. (版本)	DESCRIPTION (修改内容)	DATE. (日期)

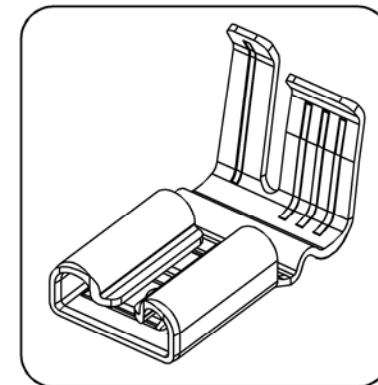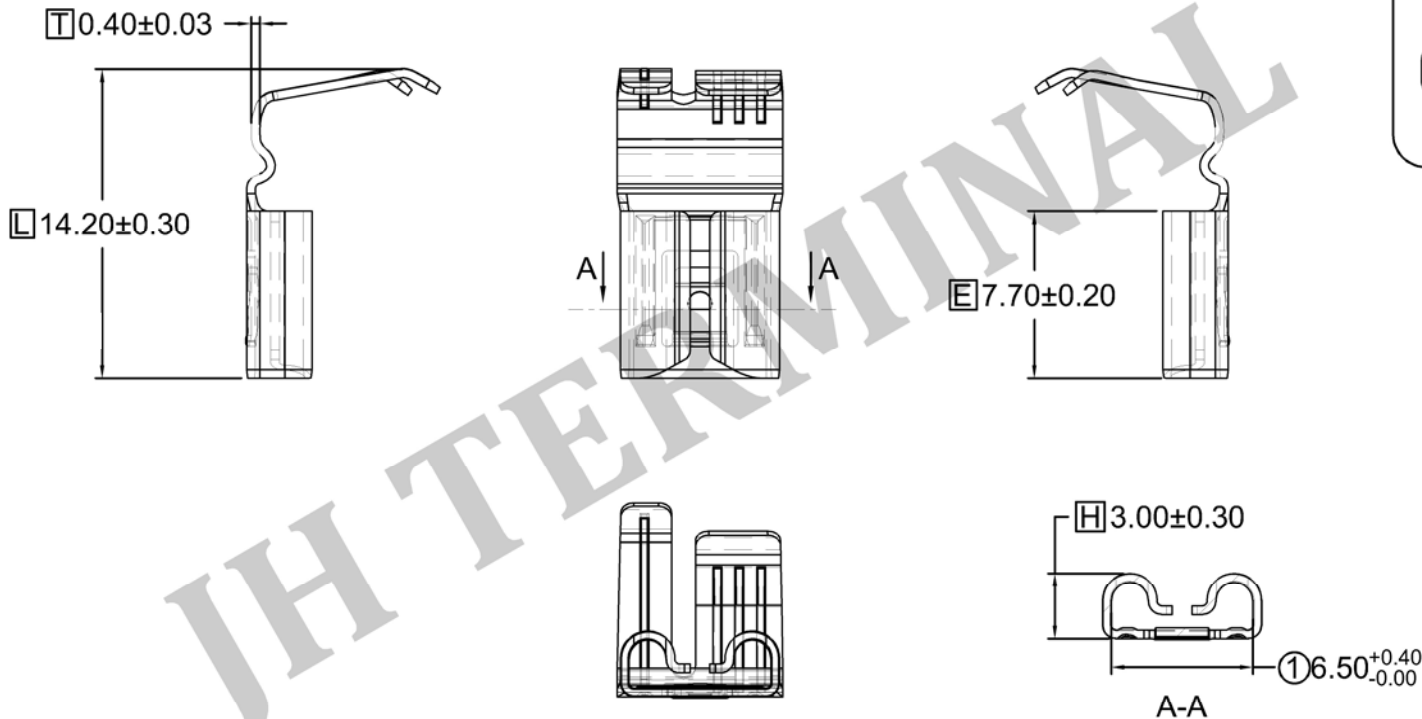

JH TERMINAL

此产品规格图仅供参考, 不做承认使用  
This product specification drawing is for reference only and does not recognize the use of

未标注尺寸公差参考 Unmarked dimensional tolerance reference		导线导体规格 Conductor	0.75~1.5mm <sup>2</sup>	
0±0.2	0°±5°	导线绝缘OD Insulation	-	
0.0±0.2	0.0°±3°	核准 APPROVED	审核 CHECKED	制图 DRAWING
0.00±0.1	0.00°±1°	尺寸单位 Units	mm	
0.000±0.05		日期 DATE	版本 REV.	

产品料号 Part NO.	F250242	文件名称 File Name	参考规格图 Product Specification
产品规格 Note	-	文件编号 File NO.	-
客户料号 Customer's Part NO.	-	单重 Single Weight	-
材质 Material	-	包装数量 Packing Q'TY	3000Pcs/Reel
适配端子 Mating Part Spec.	(W)6.3*(T)0.8mm	认证编号 Certification NO.	-

